

»FUTURA-mini« series


Max. input pressure	12 bar
Temperature range	-10 °C to 50 °C
Medium	Compressed air, neutral gases
Housing	PA66 GF60
Connecting thread	Plastic

### Manifold with pressure switch


Art. No.	Type No.	Thread	Size	Outlet	Adjustment range bar
142518	FUM 941-DS10	G 1/4	0	2 x G 1/4	0.5 - 10

### Accessories / spare parts

Art. No.	Type No.	Description
143105	H 848	Mounting bracket, incl. 2 screws
143010	WKM 100	Coupling package for wall mounting incl. 2 screws and O-ring
143022	KPM 100	Coupling package incl. 2 screws and O-ring
152077	WK 100-14	Wall bracket with connection thread G 1/4
100280	DS 9410	Pressure switches - suitable for flange mounting
100281	22.DS9410.4	Moulded seal for flanged pressure switch
100282	1920.11P4	Coupling socket for pressure switch

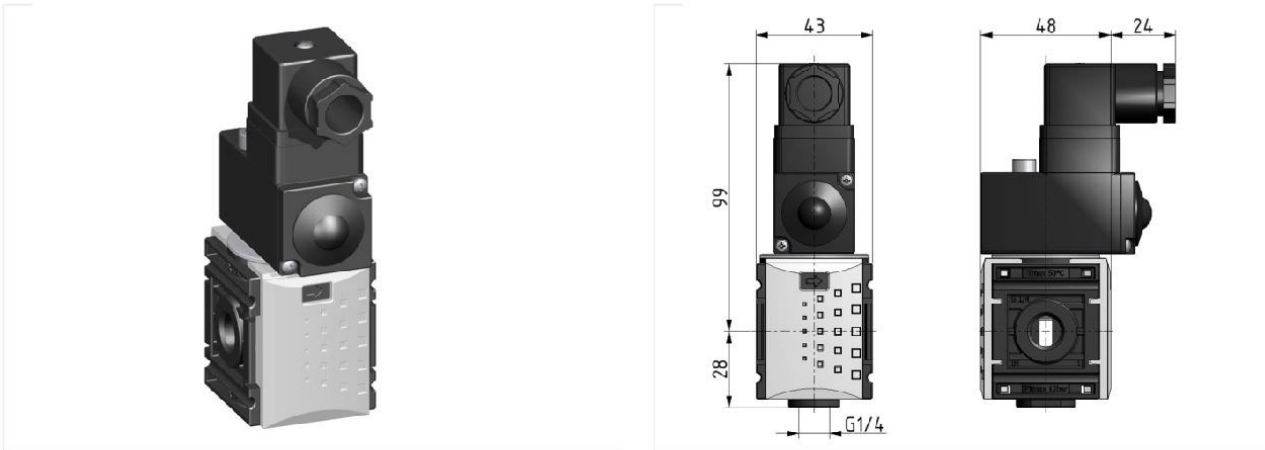

### symbol



- flow rate 1 => 2: 2700 l/min
- flow rate below 1 => 2.1: Qn = 950 l/min (at P1 = 6 bar, delta p = 1 bar)
- flow rate top 1 => 2.2: Qn = 2000 l/min (at P1 = 6 bar, delta p = 1 bar)