

Principle:

High and avoidable energy costs are caused every year by leaks in compressed air and gas installations. Noise in the ultrasonic range is caused by gases escaping from leaks. These ultrasonic sounds are not audible to the human ear.

The LS 250 leak detector picks up even smallest leaks from a distance of several metres. How? It transforms the inaudible ultrasonic sounds into a frequency that can be detected visually on the display and acoustically with the aid of the soundproof headphones.

The LS 250 is the further development of the proven LS 200. Like the LS 200, it convinces with a fine sensor technology that effectively improves the detection of leaks. The integrated laser pointer is used for target bearing. This allows leaks to be localised precisely. In addition to the advantages of the LS 200, the LS 250 also has a large touch display.

The specially designed bell achieves a better bundling of the sound waves. This horn acts like a directional microphone. Disturbing background noises, for example those that occur during operation, are suppressed or faded out. This makes it easier to locate leaks even in areas that are difficult to access.

Applications:

Leak detection in compressed air, gas, steam and vacuum systems (not suitable for helium)

Advantages:

- Fast and simple measurements, even from a distance of several metres
- Measurements can be carried out "on the fly" without disrupting operation
- High cost saving means a short payback period
- Not affected by the presence of wind or airborne contaminants because the acoustic frequency is in the ultrasound range

Included in the handy carrying case:

- Leak detector with ultrasonic sensor
- Focus tube with focus tip
- Acoustic trumpet
- High-comfort, padded headset
- Battery charger / power plug
- Carrying case




Working frequency	40 kHz ± 2 kHz
Connection	Mains adapter socket for external charging unit 3,5 mm jack plug for headphones
Laser as a visual tool	Wave length: 630...660 nm, Output power: < 1 mW
Power supply	Lithium-ion battery with high capacity, external recharger
Operating time	> 10 hours
Charging time	max. 4 hours
Operating temperature	-5 °C to +50 °C
Storage temperature	-20 °C to +60 °C

Leak detector

Article No.	Type No.	Description
206419	LS 250	Leak detector LS 250 incl. accessories in a practical case

- ➔ Existing compressed air systems often have enormous potential for optimisation. This can lead to significant cost savings and at the same time contribute to resource and climate protection. In Germany alone, 62.000 installed compressed air systems consume 14 billion kWh of electrical energy every year. At least 15% to 20% of this can easily be saved. (Source: Fraunhofer Institute, Karlsruhe)

KOSTENAUFTEILUNG EINES DRUCKLUFTSYSTEMS

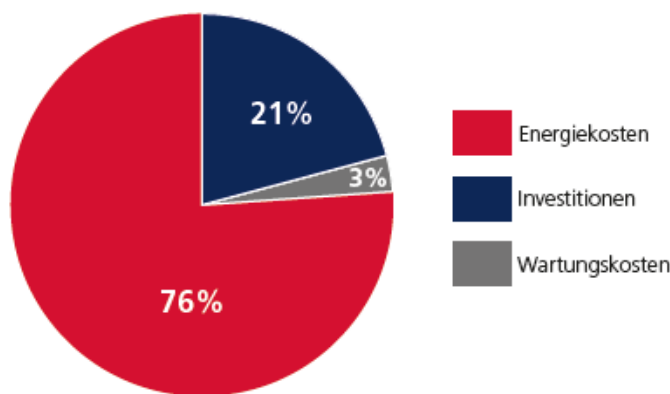

Ein Großteil dieser Kosten entsteht durch Leckagen im Druckluftsystem. Die Luft „entweicht“ ungenutzt. Der Energieaufwand zum Ausgleich der dadurch entstehenden Druckluftverluste ist beträchtlich.

JÄHRLICH ENTSTEHENDE KOSTEN DURCH LECKAGEN:

Loch in mm	Luftverlust/Sekunde		Luftverlust/Jahr		Kosten/Jahr	
	bei 6 bar (l/s)	bei 12 bar (l/s)	bei 6 bar m³/Jahr	bei 12 bar m³/Jahr	bei 6 bar Euro	bei 12 bar Euro
1	1,2	1,8	34.560	51.840	691	1.037
3	11,1	20,8	319.680	599.040	6.394	11.981
5	30,9	58,5	889.920	1.684.800	17.798	33.696

Quelle: VDMA
Berechnungsgrundlage:
Druckluftsystem 8.000 h/Jahr in Betrieb
Angenommene Kosten 0,02€/Nm³