



Compact, low-price non-return valves with very low opening pressure.


Body: Brass
 Slide: Polyether imide (PEI)
 Sealant: NBR
 Spring: Stainless steel
 Opening pressure: 20 - 50 mbar
 Operating temperature: -10 °C to +100 °C




1	Body
2	Socket
3	Slide
4	Seal
5	Spring



Art. No.	Ident No.	Thread	DN mm	A mm	Ø B mm	CH mm	Kv	PN	Weight kg
227.41	103875	G 1/2	15	44.5	28.0	25	3.9	40	0.1
227.42	103876	G 3/4	20	47.5	34.5	31	5.2	40	0.2
227.43	103877	G 1	25	56.0	42.0	38	9.4	25	0.3
227.44	103878	G 1 1/4	32	62.0	52.0	48	14.5	25	0.4
227.45	103879	G 1 1/2	40	70.0	61.0	54	23.5	16	0.6
227.46	103880	G 2	50	78.0	73.0	67	33.5	16	0.9

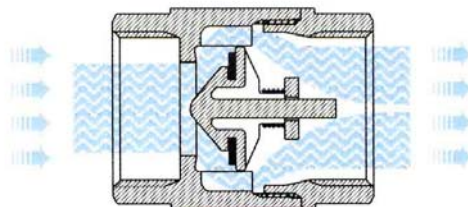

Pressure / temperature diagram

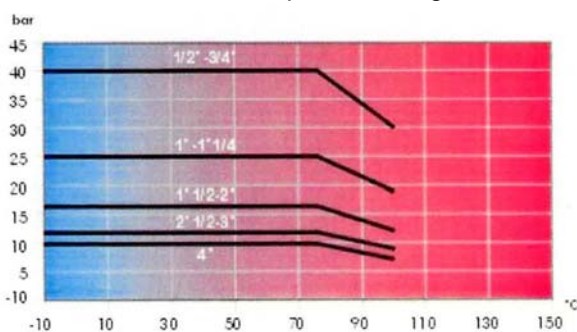

Flow rate diagram

