


For reducing the exhaust noise generated by pneumatic equipment

Operating pressure 0 to 8.0 bar  
 Operating temperature -10 °C to +250 °C  
 Noise level at 6 bar 71~108 dB(A)

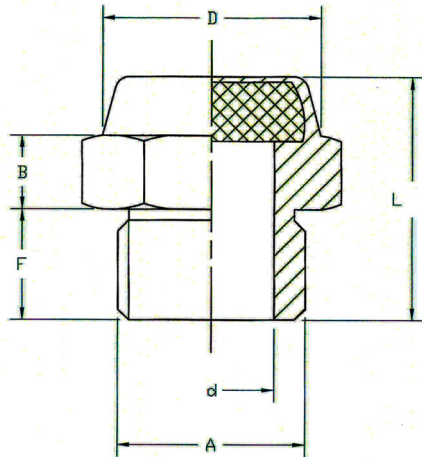

569-2

### Silencers, sintered bronze, flat type with male thread

Art. No.	Type No.	A	D	d	B	F	a/f	L
113333	569-0	M5	7.8	2.5	2.5	4.0	8	8.0
113334	569-1	G 1/8	12.8	6.0	4.0	6.0	13	13.0
101471	569-2	G 1/4	14.8	8.5	5.0	7.5	15	16.5
113335	569-3	G 3/8	18.8	11.5	5.0	7.5	19	16.5
101472	569-4	G 1/2	23.0	15.0	6.5	9.0	24	18.5
113336	569-5	G 3/4	26.0	20.5	7.0	11.0	27	19.5
113337	569-6	G 1	35.0	26.0	8.0	14.0	36	24.0

### Noise level at 6 bar

Art. No.	Type No.	< dB1	< dB2	≥ ΔdB
113333	569-0	98.4	71.6	26.8
113334	569-1	110.6	82.9	27.7
101471	569-2	112.8	89.5	23.3
113335	569-3	113.4	87.8	25.6
101472	569-4	115.6	89.4	26.2
113336	569-5	-	-	-
113337	569-6	-	-	-

dB1 = Noise level without silencer  
 dB2 = Noise level with silencer  
 ΔdB = Noise reduction