


For compressed air, anti-spark.

For simple mounting on the wall or ceiling. Shock resistant, solid and closed housing made of POM, disposal/outflow R 3/8 ET and with light, heavy duty, oil resistant and spark erosion protected polyurethane hose. The hose is resistant to flying sparks and scorching, which can occur in the welding environment or with the use of cutting tools. Incl. 1.5 m supply hose.

| | |
|-------------------------|---|
| Hose material | braided, spark erosion protected polyurethane |
| Max. operating pressure | 12 bar |
| Operating temperature | -20 °C to 60 °C |
| Swivel angle | 180 ° |

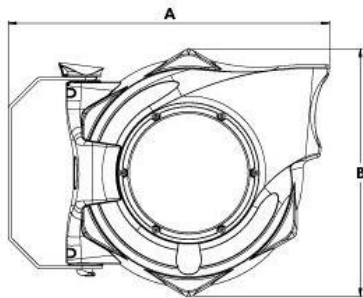

259/5130-1

Hose reel for compressed air, anti-spark

| Art. No. | Type No. | Hose size mm | Hose length m | A mm | B mm |
|----------|------------|-----------------|------------------|---------|---------|
| 159988 | 259/5130-1 | 9.5x13.5 | 14 | 490.0 | 409.0 |